



MANDA PRO STK


M&A Technology offers a wide range of solutions for OEM customers and resellers. With our custom manufacturing capabilities, M&A Technology is your single source for IT solutions that are built specifically for your business needs. We build your products to your specifications.

- Contrat manufacturing in our ISO 9001-2000 certified facility in Dallas, TX.
- DVRs, wall mounted and RM
- Storage servers
- Custom servers and workstations
- Home/SOHO backup servers
- Simulation & training workstations
- Digital signage
- Retail kiosks and POS

M&A Technology, Inc.
2045 Chenault Dr
Carrollton, TX. 75006
www.macomp.com
800-225-1452



Specifications:

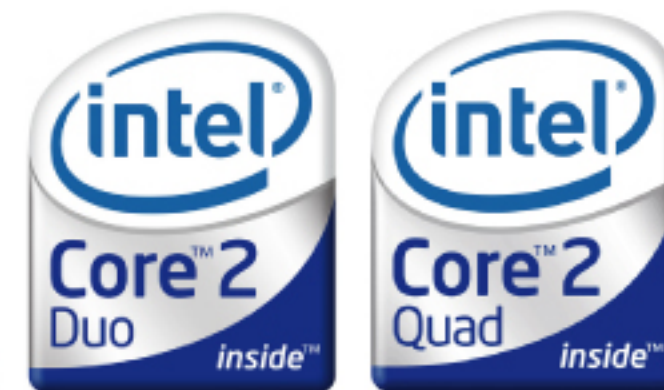

Processor :

Intel® Core™2 Duo E7400 / 2.8 GHz
Intel® Core™2 Quad processor (95 W)
Intel® Core™2 Duo processor
or Intel® Celeron® processor 400

FSB support

1333/1066/800 MHz (1066 MHz)

Chipset

Chipset Intel® G41 Express Chipset

Graphics

GeForce 8600GT with 512MB DDR3

Memory

1GB PC5400 667MHz DDR2 Memory
Support for DDR2 800/667 up to 8 GB

Audio

6-channel (5.1) audio subsystem
Realtek® ALC888VC audio codec
Two integrated stereo speakers, 1 W each

Video Controller

Intel® Graphics Media Accelerator X4500

LAN controller

10/100/1000 LAN (RealTek® RTL 8111*)

USB connectors

2 USB 2.0 front
One internal serial port header (RS232)

Display

Viewable Size 19 inch diagonal
Touchscreen Type 5-wire resistive
Contrast Ratio 800:1
Viewing Angle 170° H and 170° V
Response Time (Typical) 5 ms
Brightness (w/touchscreen) 228 cd/m²
Display Resolution 1280 X 1024

Dimensions(HWD):

62.5" x 18.5" x 17"
1587mm x 470mm x 432mm

Optical Drive:

DVDRW Optical Multi Drive
CD Write 48x , DVD Write 20x
DVD(DL) Write 8x,DVD(RAM) Write 14x
Buffer Size 2 MB

Card Reader:

Supported Media Cards:
CF™, MicroDrive™, miniSD™
Secure Digital™ (SDHC), microSD™,
MultiMediaCard™, Memory Stick™,
Mem. Stick Duo, Mem. Stick™ Micro,
and xD-Picture Card™ Type H, M, M+

Hard Drive:

500 GB Hard Drive, 7200 rpm, SATA
Cache 16 MBytes

Recite Printer

Thermal Print (150mm/sec.)
Autocutter
Barcodes: UPC-A, UPC-E, EAN-13,
EAN-8, CODE39, ITF, CODABAR,
and CODE128

Standard Expansion Bays

5.25" Ext Bay x 2
3.5" Int Bay x 1

All in use in this configuration.

System Fan:

Optional 80mm x 2

Power Supply:

300W PSU 12V-ATX

